



**CUSHMAN®**

# HAULER® 800



## **EFFICIENT AND RELIABLE – THE “GO-TO” VEHICLE.**

The Cushman® Hauler® 800 is built to move people and small equipment around any work site with ease. With standard seating for two, a 5.9-cubic-foot cargo bed and a total capacity of 800 pounds, this vehicle can carry small crews around any site quickly. The Hauler 800 is the ideal runabout vehicle to handle everyday tasks and transportation needs.

**LET'S WORK.®**

**800<sup>LB</sup>**  
TOTAL LOAD  
CAPACITY

**LIMITED  
SLIP**  
DIFFERENTIAL  
OPTION

**5.9<sup>CU FT</sup>**  
CARGO BED  
CAPACITY






# CUSHMAN® HAULER® 800



HEADLIGHTS

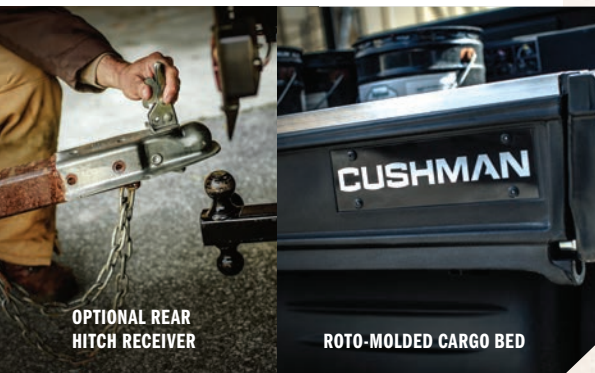

OPTIONAL REAR  
HITCH RECEIVER

ROTO-MOLDED CARGO BED

## OPTIONS & ACCESSORIES

- Front and Rear Bumpers
- Heater/Defroster
- Rear Shock Absorbers
- Rearview Mirrors
- Roll Over Protection System with Seat Belts and Side Nets
- Spark Arrestor
- Box Sides and Tailgate
- Back-Up Alarm
- Speedometer
- Power Dump
- Strobe Light
- Body Color (Patriot Blue, Ivory, White, Yellow, Orange or Custom Options)
- Turn Signal with Four-Way Flashers
- Steel Cab



COVERED WITH THE 2-YEAR CUSHMAN CARE TOTAL PROTECTION WARRANTY

|                                  | ELECTRIC MODEL  | GAS MODEL                                |
|----------------------------------|---|--|
| <b>BODY &amp; CHASSIS</b>        |   |  |
| FRAME                            | Welded Steel w/ DuraShield™ Powder Coat   |  |
| BODY & FINISH                    | Injection Molded TPO (Front) / Steel Polyester Powder Coat (Rear)                           |  |
| STANDARD COLOR                   | Forest Green  |  |
| <b>DIMENSIONS</b>                |   |  |
| OVERALL LENGTH                   | 107.0 in (272 cm)   |  |
| OVERALL WIDTH                    | 49.5 in (126 cm)  |  |
| OVERALL HEIGHT                   | 46.5 in (118 cm) (w/o Roof) / 70.0 in (178 cm) (w/ Struts & Roof)                           |  |
| WHEEL BASE                       | 65.5 in (166 cm)  |  |
| WHEEL TRACK                      | 37.0 in (94 cm) Front / 38.0 in (97 cm) Rear  |  |
| GROUND CLEARANCE                 | 4.3 in (11 cm)  |  |
| CARGO DECK CAPACITY              | 5.9 cu ft (0.17 m³)   |  |
| CARGO DECK MATERIAL              | Roto-Molded Polyethylene  |  |
| <b>POWER</b>                     |   |  |
| POWER SOURCE                     | 48V DC Shunt Wood   | 4-Cycle, 24.5 ci (401cc) Cylinder        |
| VALVE TRAIN                      | N/A   | Single Cylinder OHV                      |
| HORSEPOWER (KW)                  | 3.0 hp (2.2 kW) Continuous  | 13.5 hp (10.1 kW) Exceeds SAE J1940 Std. |
| ELECTRICAL SYSTEM                | 48V   | Starter/Generator. Solid State Reg.      |
| BATTERY (QTY/TYPE)               | Six, 8V Deep Cycle  | One, 12V Maintenance Free                |
| BATTERY CHARGER                  | 48V DC PowerWise™ QE, 120V AC, UL/CSA   | N/A                                      |
| KEY OR PEDAL START               | Pedal   |  |
| AIR CLEANER                      | N/A   | Industrial Rated Dry Filter              |
| LUBRICATION                      | N/A   | Pressurized Oil System                   |
| OIL FILTER                       | N/A   | Spin-On                                  |
| COOLING SYSTEM                   | N/A   | Air Cooled                               |
| FUEL CAPACITY                    | N/A   | 6.0 Gallon (22.7 L) Tank                 |
| SPEED CONTROLLER                 | 250 Amp Solid State Controller  | N/A                                      |
| DRIVE TRAIN                      | Motor Shaft Direct Drive  | Continuously Variable Transmission       |
| TRANSAXLE                        | Differential w/ Helical Gears   |  |
| GEAR SELECTION                   | Dash-Mounted Forward-Neutral-Reverse  | Forward - Reverse                        |
| REAR AXLE RATIO                  | 12.44:1   | 11.42:1(Foreward) 15.78:1(Reverse)       |
| <b>PERFORMANCE</b>               |   |  |
| SEATING CAPACITY                 | 2-Person (Bench)  |  |
| WEIGHT W/O BATTERIES             | 747 lb (339 kg)   | N/A                                      |
| CURB WEIGHT                      | 1112 lb (504 kg)  | 895 lb (406 kg)                          |
| VEHICLE LOAD CAPACITY            | 800 lb (362 kg)   |  |
| BED LOAD CAPACITY                | 500 lb (226 kg)   |  |
| TOWING CAPACITY                  | 475 lb (215 kg) Max Load  | 720 lb (327 kg) Max Load                 |
| OUTSIDE CLEARANCE CIRCLE         | 18.9 ft (5.76 m)  | N/A                                      |
| SPEED                            | 14 mph ± 0.5 mph (23 kph ± 0.8kph)  | 14 mph ± 0.5 mph (22.5 kph ± 0.8 kph)    |
| <b>STEERING &amp; SUSPENSION</b> |   |  |
| STEERING                         | Self-Compensating Rack & Pinion   |  |
| SUSPENSION                       | Leaf Springs w/ Hydraulic Shock Absorbers   |  |
| SERVICE BRAKE                    | Rear Wheel Mechanical, Self-Adjusting Drum  |  |
| PARKING BRAKE                    | Self-Compensating, Single-Point Engagement  |  |
| TIRES (FRONT & REAR)             | Links 18 x 8.50 - 8 (4 Ply Rated) (Front) / Turf Savers 18 x 8.50 - 8 (Load Range B) (Rear) |  |

[www.cushman.com](http://www.cushman.com)

©2016 Textron Specialized Vehicles Inc. All rights reserved. Features and specifications of the vehicles are subject to change without notice. Vehicle as photographed may include options not included on base model.

82288-G4 (Rev. 01/2016)